


# VAR-SOM-SOLO/DUAL

from \$42

Staying on-trend with the market's shift towards a cost-effective highly integrated off-the-shelf solution, the VAR-SOM-SOLO/DUAL from Variscite levels the playing ground for a broad spectrum of embedded products.

Bringing all the benefits of the widely successful VAR-SOM-MX6, the VAR-SOM-SOLO/DUAL from Variscite carries much smaller dimensions and a slim lined price-point.

Features include NXP's i.MX6 1GHz single and dual Cortex-A9, SLC NAND, eMMC, dual band Wi-Fi/BT

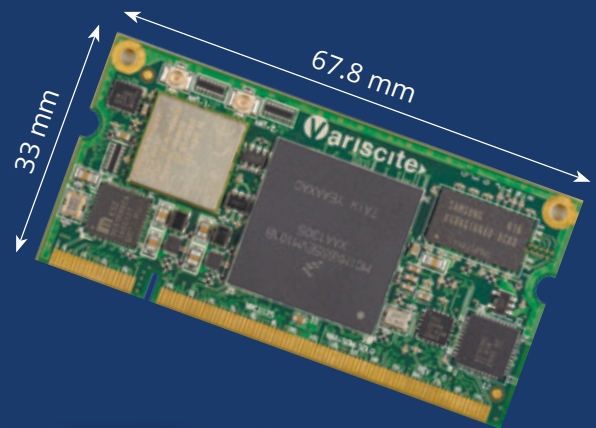

with MIMO, USB, Gigabit Ethernet, A/V interfaces and industrial operating temperatures.

The VAR-SOLOCustomBoard completes an attractive full reference kit which can be used for customers evaluation, development and mass production.

## Main Features

### NXP i.MX6

- High performance 1.0 GHz Single and Dual Core Cortex-A9
- Up to 1GB DDR3, 1GB SLC NAND and 64GB eMMC
- Full HD 1080p video encoding/decoding capability
- Vivante GPU providing 2D/3D acceleration

### Display Support

- 2 x LVDS, HDMI 1.4, MIPI-DSI
- LCD: WUXGA (1920 x 1200), HDMI: 1080p
- 4-wire resistive touch panel

### Networking

- Gigabit Ethernet
- Certified WiFi 802.11 a/b/g/n with MIMO and Bluetooth 4.2/BLE

### USB

- USB 2.0 OTG
- USB 2.0 Host

### Audio

- Digital audio SSI(AUDMUX)/SPDIF
- Digital microphone (stereo)
- Headphone out, Line-in

### Camera

- MIPI CSI serial input
- 2 x parallel input

### Other Interfaces:

- Dual CAN, I2C, SPI, PWM, JTAG, Keypad
- PCIe, JTAG

### -40 to 85°C industrial temperature support

### OS Support

- Linux
- Android

### Power

- Single 3.3V
- Digital I/O 3.3V
- RTC external backup battery

### Dimensions (W x L x H):

- 33 mm x 67.8 mm x 4.5 mm



# Complementing the VAR-SOM-SOLO/DUAL

## VAR-SOM-SOLO/DUAL Evaluation Kit

The VAR-DVK-SOLO/DUAL allows full performance and capability evaluation, serving as a development and an evaluation platform for hardware and software teams.

### Evaluation Kit content

- VAR-SOLOCustomBoard populated with VAR-SOM-SOLO/DUAL
- 7" LCD + capacitive touch panel
- Power supply and communication cables
- Documentation and design package



## VAR-SOLOCustomBoard

### VAR-SOLOCustomBoard - Supporting VAR-SOM-SOLO/DUAL

The VAR-SOLOCustomBoard ensures scalable and simplified development to achieve a short-time to market for current innovations. Moreover, it can be used as a carrier board for mass production of customers' end-products.



### Display Support

- 4-pair 24-bit LVDS header
- 3-pair 18-bit LVDS header
- HDMI 1.4

### Touch Panel

- 4-wire resistive touch panel (4-pin FFC/FPC)
- Capacitive touch support (6-pin FFC/FPC)

### Audio/Video

- Serial camera (MIPI CSI)
- Parallel camera (header)
- Headphone
- Line-in
- Digital microphone

### USB

- 1 x USB 2.0 host
- 1 x USB OTG

### Ethernet

- Gigabit Ethernet

### Storage

- SD/MMC card socket

### Debug

- Micro USB
- JTAG (header)

### RTC backup battery

- CR1225 coin battery socket

### Additional expansion Connectors

- SPI, I2C
- CAN Bus
- UART, RS232
- Digital microphone
- PWM

### Power

- 5V DC input

### Size

- 8.7cm x 11.7cm

## About Variscite

Variscite is a leading System on Modules (SoM) and Single-Board-Computer (SBC) design and manufacture company. A trusted provider of development and consulting services for a variety of embedded platforms, Variscite transforms clients' visions into successful products.

For more information contact:

[sales@variscite.com](mailto:sales@variscite.com)

Copyright ©2019 Variscite. All rights reserved. Variscite Ltd. logos and product names are registered trademarks of Variscite Ltd. No part of this document may be reproduced by any means, nor translated to any electronic medium without the written consent of Variscite. Information contained in this document is believed to be accurate and reliable; however, Variscite assumes no responsibility for its use. Specifications are subject to change without notice.

