



VARISCITE LTD

---

## 7" TFT RGB DISPLAY WITH PCAP

Variscite PN: VLCD-CAP-GLD-RGB

Display Model: SGD GKTW70SDAD1SD



Product Specification				
	Model: GKTW70SDAD1SD	Rev. No.	Issued Date.	Page.
		B	2014, Nov. 26	1 / 20

Thin-Film-Transistor LCD Module  
Model: GKTW70SDAD1SD

Acceptance

**Solomon Goldentek Display(DONG GUAN) LTD.**  
168,Fu Xiang Blvd,Di Yong Industrial Zone,  
Gao Bu,Dong Guan,Guang Dong 523273,China  
FAX: +86-769-8873-7947

Approved and Checked by

Approved by	Checked by		Made by
			

**SOLOMON GOLDENTEK DISPLAY CORP. SGD®**



Product Specification				
	Model: GKTW70SDAD1SD	Rev. No.	Issued Date.	Page.
		B	2014, Nov. 26	2 / 20

Revise Records

Rev.	Date	Contents	Written	Approved
A	2014/03/21	Preliminary Spec	Carl Lin	Roger Yang
B	2014/11/26	Modify 7. Projected Capacitive Touch Panel IC:FT5406DQ9->FT5446	Carl Lin	Roger Yang
		Modify 9.Dimensional Outlines		

Special Notes

Note1.	
Note2.	
Note3.	
Note4.	
Note5.	

SOLOMON GOLDENTEK DISPLAY CORP. 

Product Specification				
	Model: GKTW70SDAD1SD	Rev. No.	Issued Date.	Page.
		B	2014, Nov. 26	3 / 20

## Contents

<b>1. General Description and Features.....</b>	<b>4</b>
1.1 Features	4
1.2 LCD Module	4
<b>2. Mechanical Information .....</b>	<b>4</b>
<b>3. Electrical Specifications.....</b>	<b>5</b>
3.1 Absolute Max. Ratings	5
3.2 AC Timing Characteristic of The LCD	8
<b>4. Optical Characteristics.....</b>	<b>11</b>
4.1 Optical characteristic of the LCD	11
<b>5. I/O Terminal.....</b>	<b>14</b>
5.1 Pin Assignment	14
5.2 Block Diagram	16
<b>6. Display Color and Input Data.....</b>	<b>17</b>
<b>7. Projected Capacitive Touch Panel.....</b>	<b>18</b>
<b>8. Reliability Condition .....</b>	<b>19</b>
<b>9. Dimensional Outlines.....</b>	<b>20</b>

SOLOMON GOLDENTEK DISPLAY CORP. 

Product Specification				
	Model: GKTW70SDAD1SD	Rev. No.	Issued Date.	Page.
		B	2014, Nov. 26	4 / 20

## 1. General Description and Features

GKTW70SDAD1SD is a transmissive type color active matrix TFT (Thin Film Transistor) liquid crystal display (LCD) that uses amorphous silicon TFT as a switching device. This model is composed of a TFT-LCD module, a driver circuit and a LED Driver unit. Graphics and texts can be displayed on a WVGA 800 (W) x 3 x 480 (H) dots (16:9 aspect ratio) with 262,144 colors by supplying 18 bits data signal (6bits/each color). The following table described the features of GKTW70SDAD1SD.

### 1.1 Features

- Transmissive and back-light with 27 LEDs are available.
- TN (Twisted Nematic) mode.
- Digital RGB (6bits/color) data transfer.
- Data enable mode.
- Projected Capacitive Touch Panel

### 1.2 LCD Module

Item	Specification	Unit
Screen Size	7.0 inches	Diagonal
Display Resolution	800 (H) x 480 (V)	Pixel
Active Area	153.6 (H) x 86.64 (V)	mm
Outline Dimension	171.4(H) x 109.9(V) x7.35 (T)	mm
Display Mode	Normally white mode/ Transmissive	--
Pixel Arrangement	R,G,B Vertical Stripe	--
Pixel Size	192 x 180.5	um
Display Color	262K	--
Viewing Direction	6 o'clock	--
Input Interface	Digital RGB (6bits/color) Data Transfer	--

## 2. Mechanical Information

Item	Min.	Typ.	Max.	Unit	Note
Module Size	Horizontal (H)	-	(171.4)	-	mm
	Vertical (V)	-	(109.9)	-	mm
	Thickness (T)	-	(7.35)	-	mm
Weight	-	(TBD)	-	g	--

Product Specification				
	Model: GKTW70SDAD1SD	Rev. No.	Issued Date.	Page.
		B	2014, Nov. 26	5 / 20

### 3. Electrical Specifications

#### 3.1 Absolute Max. Ratings

##### 3.1.1 Absolute Ratings of Environment

If the operating condition exceeds the following absolute maximum ratings, the TFT LCD module may be damaged permanently.

( $T_a = 25 \pm 2^\circ\text{C}$ ,  $V_{SS} = \text{GND} = 0$ )

Item	Symbol	Min.	Max.	Unit	Note
Storage temperature	$T_{STG}$	-30	80	$^\circ\text{C}$	(1)
Operating temperature	$T_{OPR}$	-20	70	$^\circ\text{C}$	(1,2,3)

Note (1) 95 % RH Max. ( $40^\circ\text{C} \geq T_a$ ). Maximum wet-bulb temperature at  $39^\circ\text{C}$  or less. ( $T_a > 40^\circ\text{C}$ ) No condensation.

Note (2) In case of below  $0^\circ$ , the response time of liquid crystal (LC) becomes slower and the color of panel becomes darker than normal one. Level of retardation depends on temperature, because of LC's character.

Note (3) Only operation is guaranteed at operating temperature. Contrast, response time, another display quality are evaluated at  $+25^\circ\text{C}$ .


Product Specification				
	Model: GKTW70SDAD1SD	Rev. No.	Issued Date.	Page.
		B	2014, Nov. 26	6 / 20

### 3.1.2 Electrical Absolute Maximum Ratings


(V<sub>SS</sub>=GND=0)

Parameter	Symbol	Min.	Max.	Unit	Remark
Power supply voltage	V <sub>CC</sub>	-0.3	6.0	V	
Power supply voltage	V <sub>LED</sub>	0	6.0	V	
Signal input voltage	R0-R5,G0-G5, B0-B5,DCLK,DE	-0.3	V <sub>CC</sub> +0.3	V	--
Permissive input ripple voltage	V <sub>RF</sub>	--	100	mVp-p	V <sub>CC</sub> =+3.0V

Display On/Off Sequence :

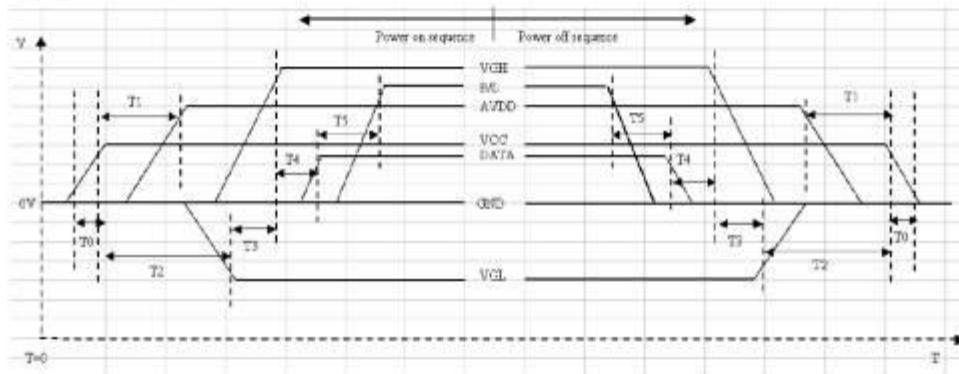

Item	Min.	Typ.	Max.	Unit
T0	0.5	--	20	msec
T1	16			msec
T2	20			msec
T3	10			msec
T4	10		50	msec
T5	50			msec



Power On Sequence: VCC-> AVDD -> VGL -> VGH -> Data -> B/L

Power Off Sequence: B/L-> Data -> VGH -> VGL -> AVDD -> VCC

Product Specification				
	Model: GKTW70SDAD1SD	Rev. No.	Issued Date.	Page.
		B	2014, Nov. 26	7 / 20

### 3.1.3 DC Electrical Characteristics of the TFT LCD

(Ta=25±2°C, V<sub>SS</sub>=GND=0)

Item	Symbol	Min.	Typ.	Max.	Unit	Remark	
Power supply logic voltage	VCC	2.7	3.0	3.5	V		
Power supply LED voltage	VLED	4.5	5	5.5	V		
Input Voltage for logic	H Level	V <sub>IH</sub>	0.7xVCC	-	VCC	V	
	L Level	V <sub>IL</sub>	0	-	0.3xVCC	V	
Power Supply current	ICC	-	170	-	mA	Note 1	
Power Supply current	I <sub>LED</sub>		450	550	mA		
LED Life time	-	(30000)	-	-	Hr	Note 2	

Note1: f<sub>v</sub> =60Hz , Ta=25°C , Display pattern : 64 Gray pattern



Note2: The environmental conducted under ambient air flow ,at Ta=25±2°C,60%RH±5%



Product Specification				
	Model: GKTW70SDAD1SD	Rev. No.	Issued Date.	Page.
		B	2014, Nov. 26	8 / 20

### 3.2 AC Timing Characteristic of The LCD


#### 3.2.1 Timing Condition (DE only mode)

Signal	Parameter	Symbol	Min.	Typ.	Max.	Unit.	Remark
DCLK	DCLK cycle time	$T_{cph}$	25	-	-	ns	
	DCLK Frequency	$f_{clk}$	-	30	40	MHz	
	DCLK High plus width	$T_{ewh}$	40	50	60	%	
Horizontal	HSD setup time	$T_{hst}$	8	-	-	ns	
	HSD hold time	$T_{hhd}$	8	-	-	ns	
	Horizontal display area	$t_{hd}$	-	800	-	Tcph	
	HSD period time	$t_h$	-	928	-	Tcph	
	HSD pulse width	$t_{hpw}$	1	48	-	Tcph	
	HSD back porch	$t_{hb}$	-	40	-	Tcph	
	HSD front porch	$t_{hfp}$	-	40	-	Tcph	
Vertical	VSD setup time	$T_{vst}$	8	-	-	ns	
	VSD hold time	$T_{vhd}$	8	-	-	ns	
	Vertical display area	$t_{vd}$	-	480	-	th	
	VSD period time	$t_v$	-	525	-	th	
	VSD pulse width	$t_{vpw}$	-	3	-	th	
	VSD back porch	$t_{vb}$	-	29	-	th	
DE	DE setup time	$T_{esu}$	8	-	-	ns	
	DE hold time	$T_{ehd}$	8	-	-	ns	
DATA	Data setup time	$T_{dsu}$	8	-	-	ns	
	Data hold time	$T_{dhd}$	8	-	-	ns	


Product Specification				
	Model: GKTW70SDAD1SD	Rev. No.	Issued Date.	Page.
		B	2014, Nov. 26	9 / 20

### 3.2.2 Timing Characteristic


#### 3.2.2.1 DE and RGB Input Timing

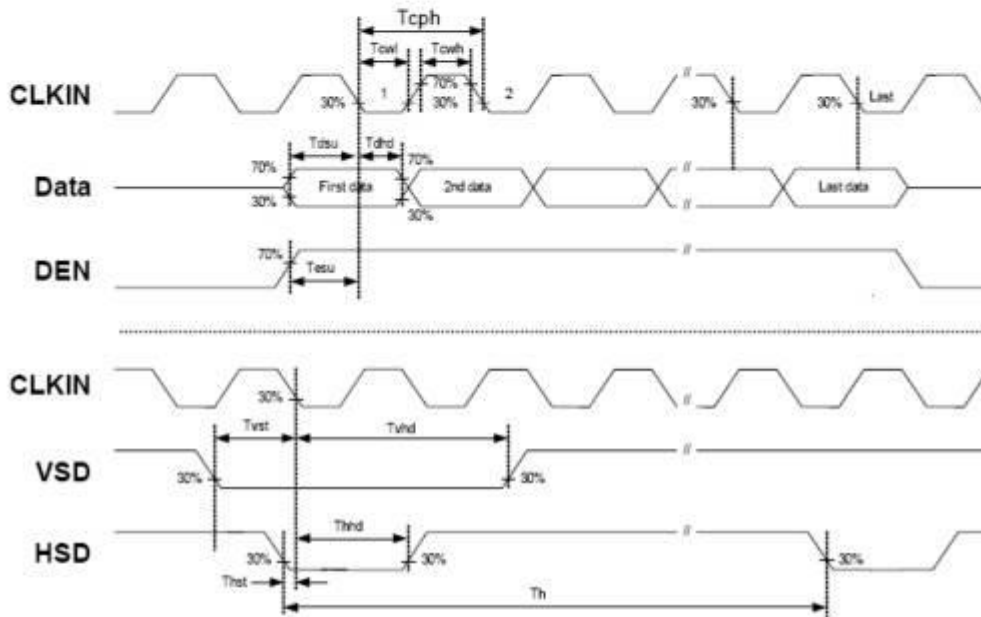

Sampling clock timing

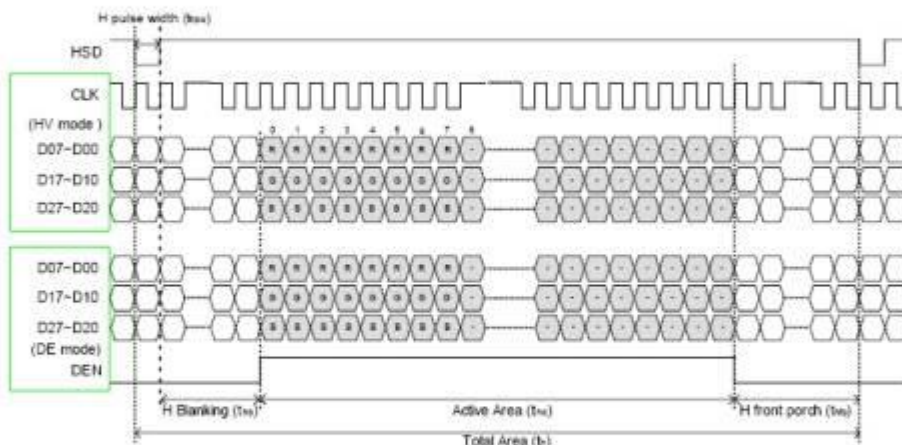

Product Specification			
	Model: GKTW70SDAD1SD	Rev. No.	Issued Date.
		B	2014, Nov. 26
			Page.
			10 / 20

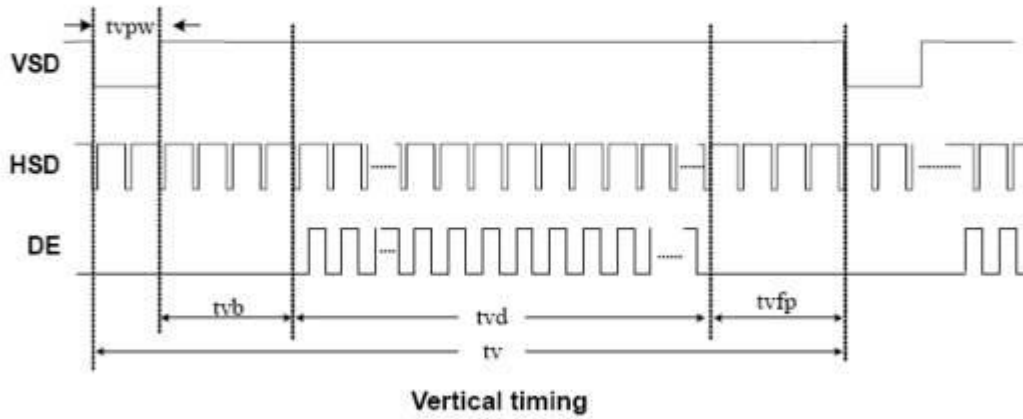

SOLOMON GOLDENTEK DISPLAY CORP. **SGD**<sup>®</sup>

Product Specification				
	Model: GKTW70SDAD1SD	Rev. No.	Issued Date.	Page.
		B	2014, Nov. 26	11 / 20

#### 4. Optical Characteristics

##### 4.1 Optical characteristic of the LCD

The following items are measured under stable conditions. The optical characteristics should be measured in a dark room or equivalent state with the methods.

Measuring equipment: BM-7A

Item	Symbol	Condition	Min	Type	Max	Unit	Note	
Brightness	B		(400)	(440)	--	cd/m <sup>2</sup>		
Response time	T <sub>r</sub>	θ=0°	-	5	7	ms	.	
	T <sub>f</sub>		--	20	28	ms		
Contrast ratio	CR	At optimized viewing angle	(400)	(500)	--	--		
Color Gamut	NTSC %	--	--	(45)	--	%		
Luminance Uniformity	ΔL		70	80		%		
Color Chromaticity (CIE 1931)	White	θ=0° Normal Viewing Angle	W <sub>x</sub>	(0.280)	(0.310)	(0.340)	--	BM-7A
			W <sub>y</sub>	(0.330)	(0.360)	(0.390)		
Viewing Angle (6H)	Hor.	CR≥10	θ <sub>rl</sub>	60	70	--	Degree	
			θ <sub>l</sub>	60	70	--		
	Ver.		θ <sub>u</sub>	40	50	--		
			θ <sub>d</sub>	50	60	--		


Product Specification				
	Model: GKTW70SDAD1SD	Rev. No.	Issued Date.	Page.
		B	2014, Nov. 26	12 / 20

a. Test equipment setup

After stabilizing and leaving the panel alone shall be warmed up for the stable operation of LCM, the measurement should be executed. Measurement should be executed in a stable, windless, and dark room. Optical specifications are measured by Topcon BM-7(fast) with a viewing angle of 2° at a distance of 50cm and normal direction.

b. Definition of response time: Tr and Tf

The response time is defined as the following figure and shall be measured by switching the input signal for "black" and "white".

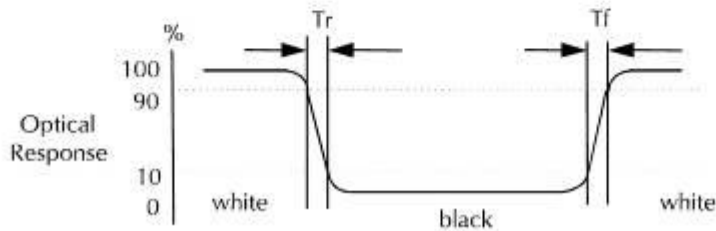


c. Definition of contrast ratio:

$$\text{Contrast Ratio (CR)} = \frac{\text{Brightness measured when LCD is at "white state"}}{\text{Brightness measured when LCD is at "black state"}}$$

d. Measured at the center area of the panel when all the input terminals of LCD panel are electrically opened.

Product Specification			
	Model: GKTW70SDAD1SD	Rev. No.	Issued Date.
		B	2014, Nov. 26
		Page. 13 / 20	

e. View Angle

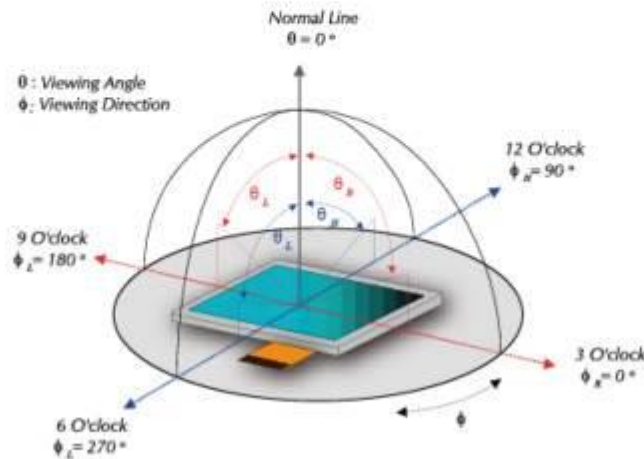

f. Definition of Luminance of White: Luminance of white at the center points

Light Source of Back-Light Unit	LED Type
---------------------------------	----------


g. Definition of White Uniformity

$$\text{White Uniformity} = \frac{\text{Min. luminance of white among 9-points}}{\text{Max. luminance of white among 9-points}} \times 100\%$$

h. The definition of Color Gamut -Color Chromaticity CIE 1931

Color coordinate of white & red, green, blue at center point.

Color Gamut : NTSC(%) = ( RGB Triangle Area / NTSC Triangle Area ) x 100



Product Specification				
	Model: GKTW70SDAD1SD	Rev. No.	Issued Date.	Page.
		B	2014, Nov. 26	14 / 20

## 5. I/O Terminal

### 5.1 Pin Assignment

Pin No.	Symbol	I/O	Function	Remark
1	GND	P	Ground	
2	GND	P	Ground	
3	ADJ	I	Brightness control for LED B/L	Note 3
4	VLED	P	Power Supply for LED Driver +5V	
5	VLED	P	Power Supply for LED Driver +5V	
6	VLED	P	Power Supply for LED Driver +5V	
7	VCC	P	Power Supply for system	
8	VCC	P	Power Supply for system	
9	DE	I	Data Enable Timing Signal	
10	GND	P	Ground	
11	GND	P	Ground	
12	GND	P	Ground	
13	B5	I	Blue data signal (MSB)	
14	B4	I	Blue data signal	
15	B3	I	Blue data signal	
16	GND	P	Ground	
17	B2	I	Blue data signal	
18	B1	I	Blue data signal	
19	B0	I	Blue data signal (LSB)	
20	GND	P	Ground	
21	G5	I	Green data signal (MSB)	
22	G4	I	Green data signal	
23	G3	I	Green data signal	
24	GND	P	Ground	
25	G2	I	Green data signal	
26	G1	I	Green data signal	
27	G0	I	Green data signal (LSB)	
28	GND	P	Ground	
29	R5	I	Red data signal (MSB)	
30	R4	I	Red data signal	
31	R3	I	Red data signal	
32	GND	P	Ground	
33	R2	I	Red data signal	
34	R1	I	Red data signal	


Product Specification				
	Model: GKTW70SDAD1SD	Rev. No.	Issued Date.	Page.
		B	2014, Nov. 26	15 / 20

35	R0	I	Red data signal (LSB)	
36	GND	P	Ground	
37	GND	P	Ground	
38	DCLK	I	Data Clock	
39	GND	P	Ground	
40	GND	P	Ground	

I: Input, O: Output, P: Power

Remarks:

- 1) NC Pin must be retained; this pin can't contact GND or other signal.
- 2) GND Pin must ground contact, can not be floating.
- 3) Connector Part No: FH12-40S-0.5SH or equivalent.
- 4) PWM : 3.3V; 20KHz, Duty 0% → Dark · Duty 100→Full Light.

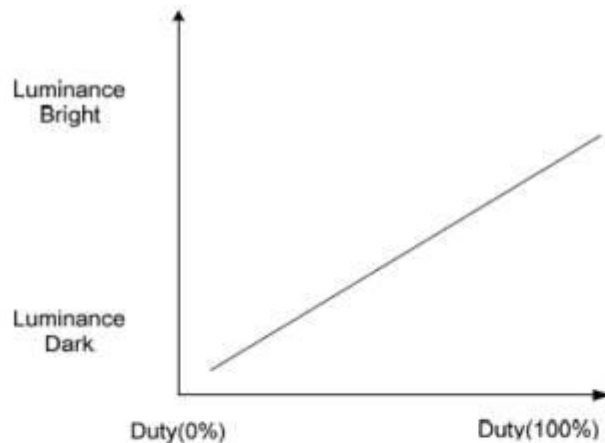


SOLOMON GOLDENTEK DISPLAY CORP. **SGD**<sup>®</sup>



Product Specification				
	Model: GKTW70SDAD1SD	Rev. No.	Issued Date.	Page.
		B	2014, Nov. 26	16 / 20

## 5.2 Block Diagram

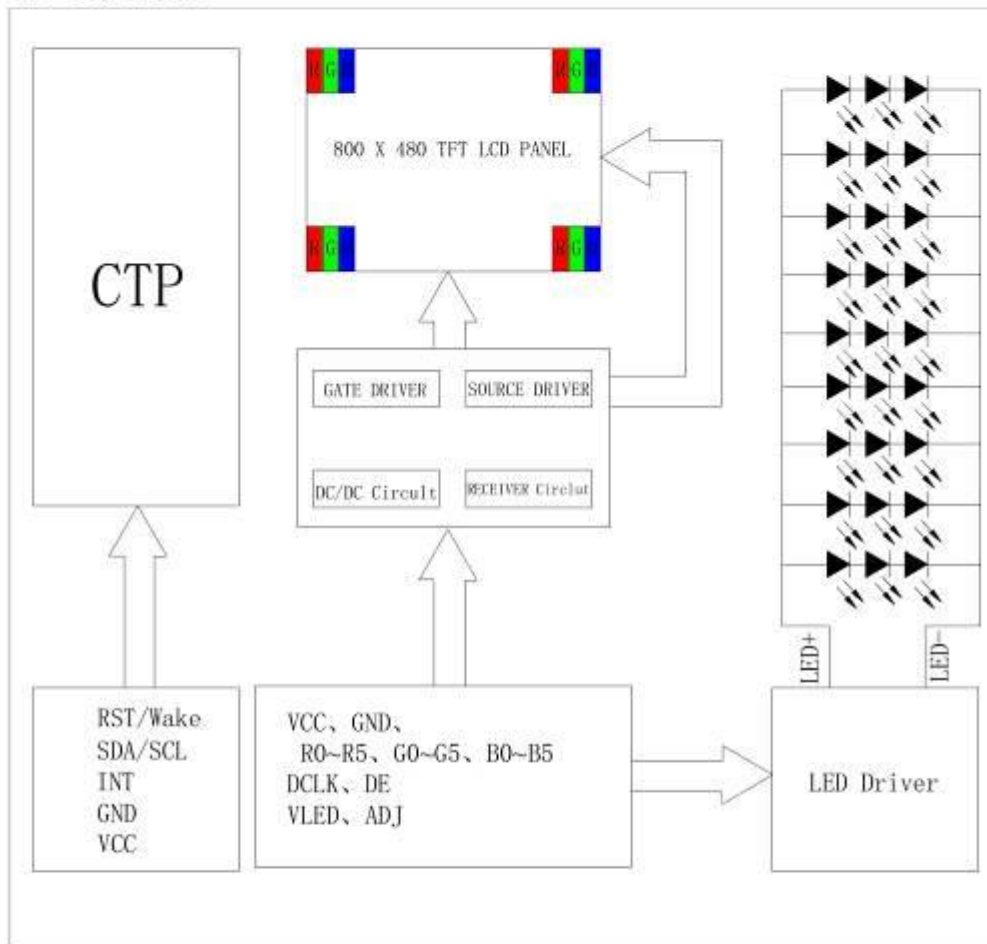

SOLOMON GOLDENTEK DISPLAY CORP. **SGD**

Product Specification				
	Model: GKTW70SDAD1SD	Rev. No.	Issued Date.	Page.
		B	2014, Nov. 26	17 / 20

### 6. Display Color and Input Data

	Color & Gray Scale	Data Signal																	
		R5	R4	R3	R2	R1	R0	G5	G4	G3	G2	G1	G0	B5	B4	B3	B2	B1	B0
Basic Color	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(0)	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Green(0)	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Blue(0)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
	Cyan	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Red	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(62)	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0
	Red(61)	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Red(31)	0	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
Red(1)	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	
Red(0)	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	
Green	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green(62)	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0
	Green(61)	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Green(31)	0	0	0	0	0	0	0	1	1	1	1	0	0	0	0	0	0	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
Green(1)	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0	0	
Green(0)	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0	
Blue	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue(62)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	Blue(61)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Blue(31)	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
Blue(1)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	0	
Blue(0)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	

0 : Low level voltage, 1 :High level voltage

Each basic color can be displayed in 64 gray scales from 6 bit data signals. With the combination of total 18 bit data signals, the 262,144-color display can be achieved on the screen.

Product Specification			
	Model: GKTW70SDAD1SD	Rev. No.	Issued Date.
		B	2014, Nov. 26
			Page.
			18 / 20

## 7. Projected Capacitive Touch Panel

### 7.1 Main Feature

Item	Specification	Unit
Screen Size	7 inches	Diagonal
Type	Transparent Type Projected Capacitive Touch Panel	--
Input Mode	Human's Finger	--
Active Area	156.48 x 88.32	mm
Module Outline	171.4(H) x 109.9(V)	mm
Interface	I2C	--
Cover glass pencil-handness	6H(min)	--
Report Rate	TBD	Points/sec
Response time	TBD	ms
Digital Power Supply	3.3V DC (typ)	V
Power Consumption	(6)	mA
IC solution	FT5446DQ9	

### 7.2 Pin Assignments and Definitions

Item	Name	I/O	Unit
1	RST/WAKE	-	Reset /Wake Up
2	SDA	I/O	I2C Data Pin
3	SCL	I/O	I2C CLK Pin
4	INT	I	I2C Interrupt Pin
5	VDD	P	Power Supply Voltage
6	GND	P	Ground

Product Specification				
	Model: GKTW70SDAD1SD	Rev. No.	Issued Date.	Page.
		B	2014, Nov. 26	19 / 20

## 8. Reliability Condition


No change on display and in operation under the following test condition.

Condition: Unless otherwise specified, tests will be conducted under the following condition.

Temperature:  $20 \pm 5^\circ\text{C}$ .

Humidity:  $65 \pm 5\% \text{RH}$ .


Tests will be not conducted under functioning state.

No.	Parameter	Condition	Notes
1	High Temperature Operating	$70^\circ\text{C} \pm 2^\circ\text{C}$ , 240hrs (Operation state).	
2	Low Temperature Operating	$-20^\circ\text{C} \pm 2^\circ\text{C}$ , 240hrs (Operation state).	1
3	High Temperature Storage	$80^\circ\text{C} \pm 2^\circ\text{C}$ , 240hrs.	2
4	Low Temperature Storage	$-30^\circ\text{C} \pm 2^\circ\text{C}$ , 240hrs.	1,2
5	High Temperature and High Humidity Operation Test	$60^\circ\text{C} \pm 2^\circ\text{C}$ , 90%, 240hrs.	1,2
6	Vibration Test	Total fixed amplitude: 1.5mm. Vibration Frequency: 10-55Hz. One cycle 60 seconds to 3 direction of X, Y, Z each 15 minutes.	3
7.	Drop Test	To be measured after dropping from 60cm high on the concrete surface in packing state.  <i>Dropping method corner dropping:</i> <i>A corner: Once edge dropping.</i> <i>B, C, D edge: Once face dropping.</i> <i>E, F, G face: Once.</i>	

- Notes:
1. No dew condensation to be observed.
  2. The function test shall be conducted after 4 hours storage at the normal temperature and humidity after removed from the test chamber.
  3. Vibration test will be conducted to the product itself without putting I in a container.

Product Specification			
	Model: GKTW70SDAD1SD	Rev. No.	Issued Date.
		B	2014, Nov. 26
		Page.	
		20 / 20	

9. Dimensional Outlines

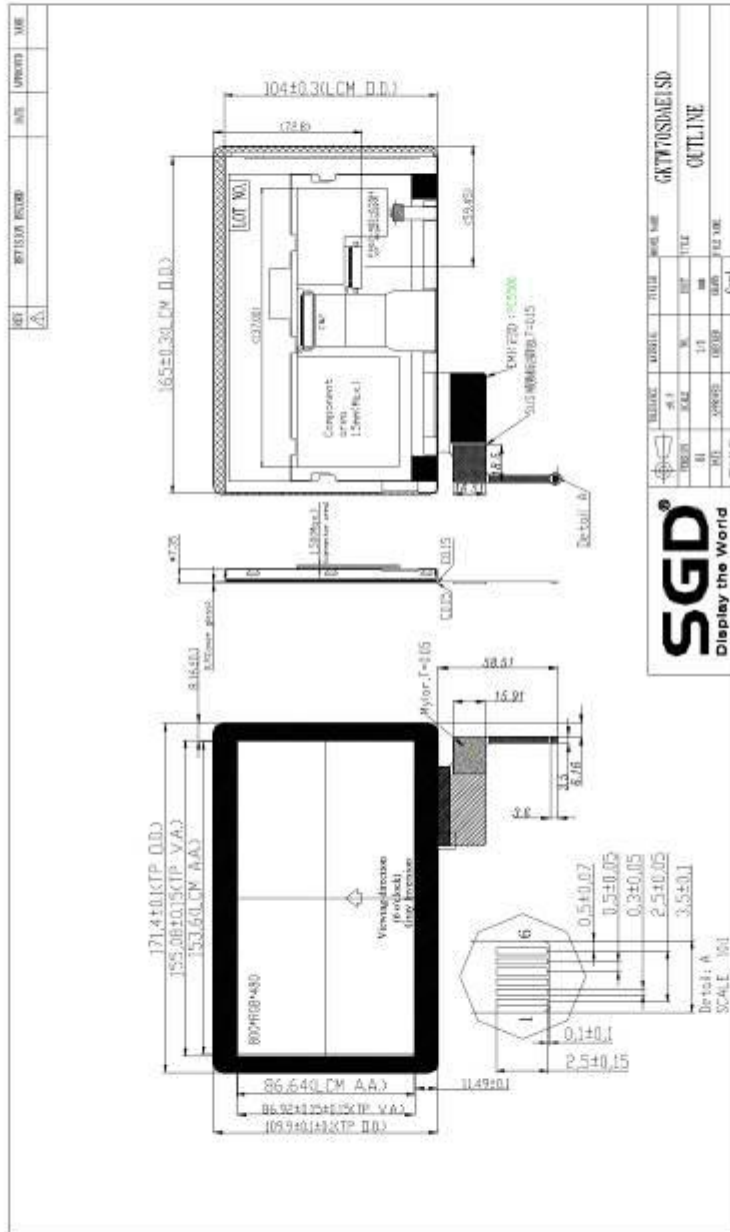

SOLOMON GOLDENTEK DISPLAY CORP. **SGD**