


# SPEAR-MX8

from \$139

The SPEAR-MX8 is a highly scalable System-on-Module provides an ideal solution for embedded products requiring advanced performance processing, high-end graphic, UltraHD video capabilities and a variety of high-speed interfaces and connectivity options.

The SPEAR-MX8 is based on NXP i.MX 8QuadMax with Dual 1.8GHz ARM Cortex-A72, Quad 1.2GHz Cortex-A53 and 2x 266MHz Real-time Cortex-M4F co-processor. An impressive multimedia performance spec encompasses UltraHD 4K video and display support, high-quality audio, a high performance 2D/3D graphics acceleration and camera/HDMI inputs.

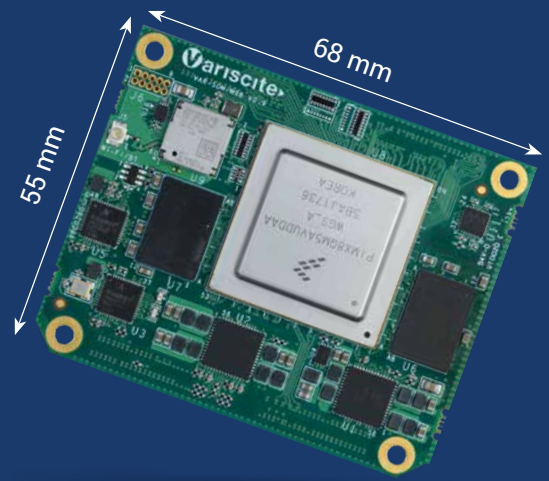

The SoM includes a variety of interfaces and connectivity options: Certified dual-band Wi-Fi 802.11 ac/a/b/g/n, BT/BLE, dual GbE, dual USB3, PCIe, SATA III, CAN, SPI and UART.

The VAR-SP8CustomBoard carrier board complements an attractive full reference kit of the SPEAR-MX8, used by Variscite's customers for evaluation, development and mass production.

## Main Features

### NXP i.MX 8 processor

- 2 x 1.8GHz ARM Cortex™-A72 plus 4 x 1.2GHz ARM Cortex™-A53
- Real-time 2x ARM Cortex-M4F
- Neon Media Processor Engine (MPE)
- Internal HiFi 4 DSP
- 2 x GC7000XSVX high performance GPU

### Memory and Storage:

- Up to 8GB LPDDR4 memory, up to 64GB eMMC storage

### Display and video Support

- UltraHD 4K Display
- 4Kp60 HEVC/H.265/H.264 decode, FHD encode
- MIPI DSI 1080p60
- HDMI 2.0a/eDP/DP
- Touch screen
- Dual channel LVDS display 1080p60

### Networking

- 2x 10/100/1000Mbps Ethernet
- Certified WiFi 802.11 ac/a/b/g/n and Bluetooth 4.2/BLE

### High Speed interfaces

- Dual USB 3.0/2.0 + HSIC port
- PCIe
- SATA III

### Audio

- Digital audio (SAI, SPDIF)
- Analog, Digital microphone (stereo)
- Headphone out, Line-in

### Camera and video input

- Dual MIPI CSI2 serial input
- HDMI input

### Other Interfaces:

- CAN, I2C, SPI, PWM, JTAG, UART, SD/MMC, GPIO, timers

### OS Support

- Linux
- Android

### Power

- Single 3.35-4.5V

### Dimensions (W x L x H):

- 55.0 mm x 68.0 mm x 4.7 mm

### -40 to 85°C industrial temperature support

### Low Power consumption:

- Optimized power consumption in both operational and suspend modes




# Complementing the SPEAR-MX8

## SPEAR-MX8 Evaluation Kit

The VAR-DVK-SP8 allows full performance and capability evaluation, serving as an evaluation, development and production platform for hardware and software teams.

### Evaluation Kit content

- VAR-SP8CustomBoard populated with SPEAR-MX8
- 7" LCD + capacitive touch panel
- Power supply and communication cables
- Documentation and design package

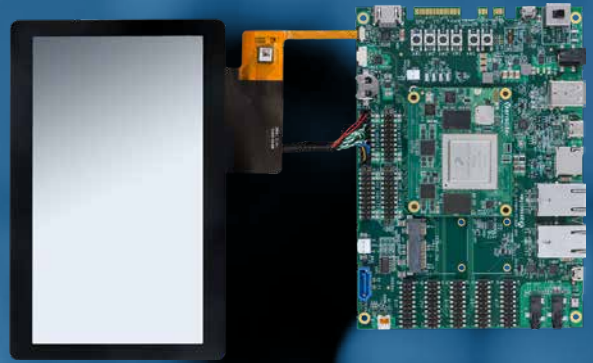

## VAR-SP8CustomBoard

### VAR-SP8CustomBoard - Supporting SPEAR-MX8

The VAR-SP8CustomBoard ensures a scalable and simplified development and reference board to achieve a short time-to-market for customer's designs and end-products.



### Display Support

- DSI, dual LVDS display, HDMI/ DisplayPort

### Touch Panel

- Capacitive touch (6-pin FFC/FPC)
- Resistive touch (4-pin FFC/FPC)

### Audio

- Headphone
- Line-in
- Digital mic

### Storage

- SD/SDIO/MMC card socket

### High speed interfaces

- 4x USB 3.0/2.0 ports
- 2x 10/100/1000Mbps Ethernet RJ45
- mPCIe
- SATA III

### Camera

- 2x MIPI CSI serial (extension connector)

### Additional expansion Connectors

- SPI, SPDIF, GPIO
- UART, I2C, CAN
- PWM
- SAI

### Debug

- Micro USB

### RTC backup battery

- CR1225 coin battery socket

### Power

- 5V DC input

### Size

- 12.0cm x 17.0cm

## About Variscite

Variscite is a leading System on Modules (SoM) and Single-Board-Computer (SBC) design and manufacture company. A trusted provider of development and consulting services for a variety of embedded platforms, Variscite transforms clients' visions into successful products.

For more information contact:

[sales@variscite.com](mailto:sales@variscite.com)

Copyright ©2019 Variscite. All rights reserved. Variscite Ltd. logos and product names are registered trademarks of Variscite Ltd. No part of this document may be reproduced by any means, nor translated to any electronic medium without the written consent of Variscite. Information contained in this document is believed to be accurate and reliable; however, Variscite assumes no responsibility for its use. Specifications are subject to change without notice.

